



■ PRODUCT CHARACTER

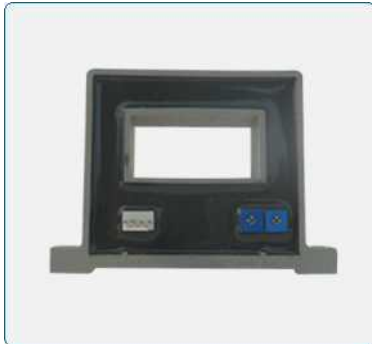

PANEL 장착용으로 40mm 부스-바 및 케이블적용이 가능하며, 넓은 정격전류 범위와 함께회로부가 제품 하단에 위치하여 사용이 용이하게설계된 제품.

■ DIMENSIONS

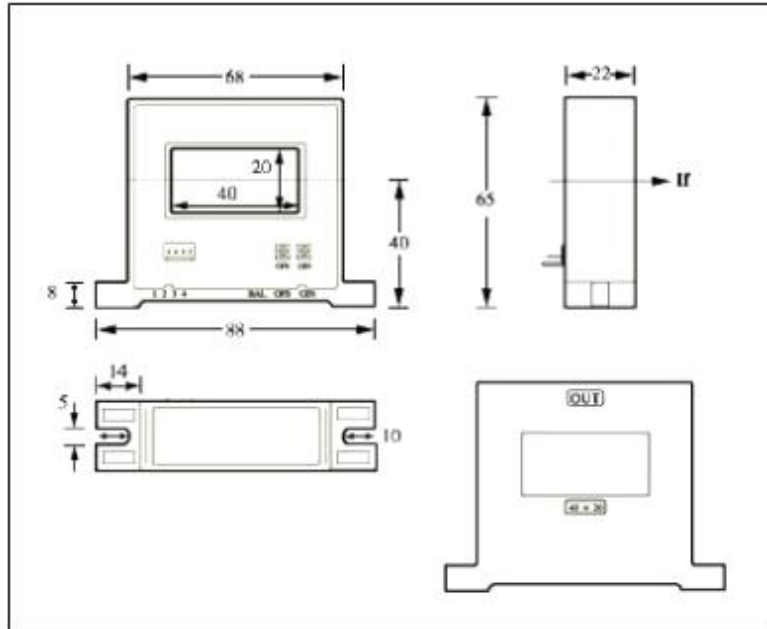

■ BSA-TYPE STANDARD SPEC

[Ta=25℃,RL=10KΩ]

Type-code		BSA	BSA	BSA	BSA	BSA	BSA	BSA	BSA
Parameter		200-15	400-15	500-15	600-15	800-15	1.0K-15	1.2K-15	1.5K-15
Rated Current (F.S.)	If	200A	400A	500A	600A	800A	1,000A	1,200A	1,500A
Linear Range		400A	800A	1000A	1,200A	1,600A	2,000A	2,400A	2,400A
Output Voltage	Vh	±04V±1% at If							
Zero Current Offset	Vo	Within ±20mV at If = 0							
Linearity of Output	ρ	Within ±1.0% of Vh at If : F.S.							
Supply Voltage	Vc	±15V ±5%							
Response Time		15μsec Max. at di/dt = F.S./μsec							
Frequency Range	f	DC ~ AC5KHz and 10KHz Max.							
Output Voltage Temperature Coef.		Within ±0.1% / °C Max.							
Zero Offset Voltage Temperature Coef.		Within ±1.0mV/ °C Max.							
Dielectric Strength		3.0KV AC with 60Hz × 1minute 관통부 내측-신호핀 간							
Insulation Resistance		500[MΩ]Min. at 500V DC 관통부 내측-신호핀 간							
Operating Temp.	Ta	-10 ~ +80℃							
Storage Temp.	Ts	-25 ~ +85℃							
Note		<p style="text-align: center;">BSA PINOUT</p> <p style="text-align: center;">(1) +15V (2) -15V (3) OUTPUT (4) 0V</p> <p style="text-align: center;">CONNECTOR : Molex 社, 5045-04A</p>							